

KSB-LE

COMPACT
GANTRY
CRANE



WORKING LOAD  **0,5 Tonnes**

FALL PROTECTION
FOR 2 USERS  **2 users**



SIZE	STANDARD
Beam length:	EN 13001
2-6m	EN 15011
Height:	EN 795/B:2012
1,9-3m	CEN/TS 16415/B:2013

ADJUSTABLE
SUPPORT


KSB-LE 100-110

BEAM


WLL 500

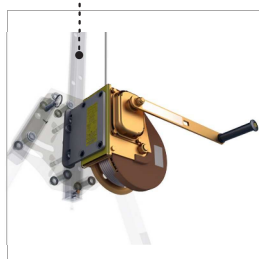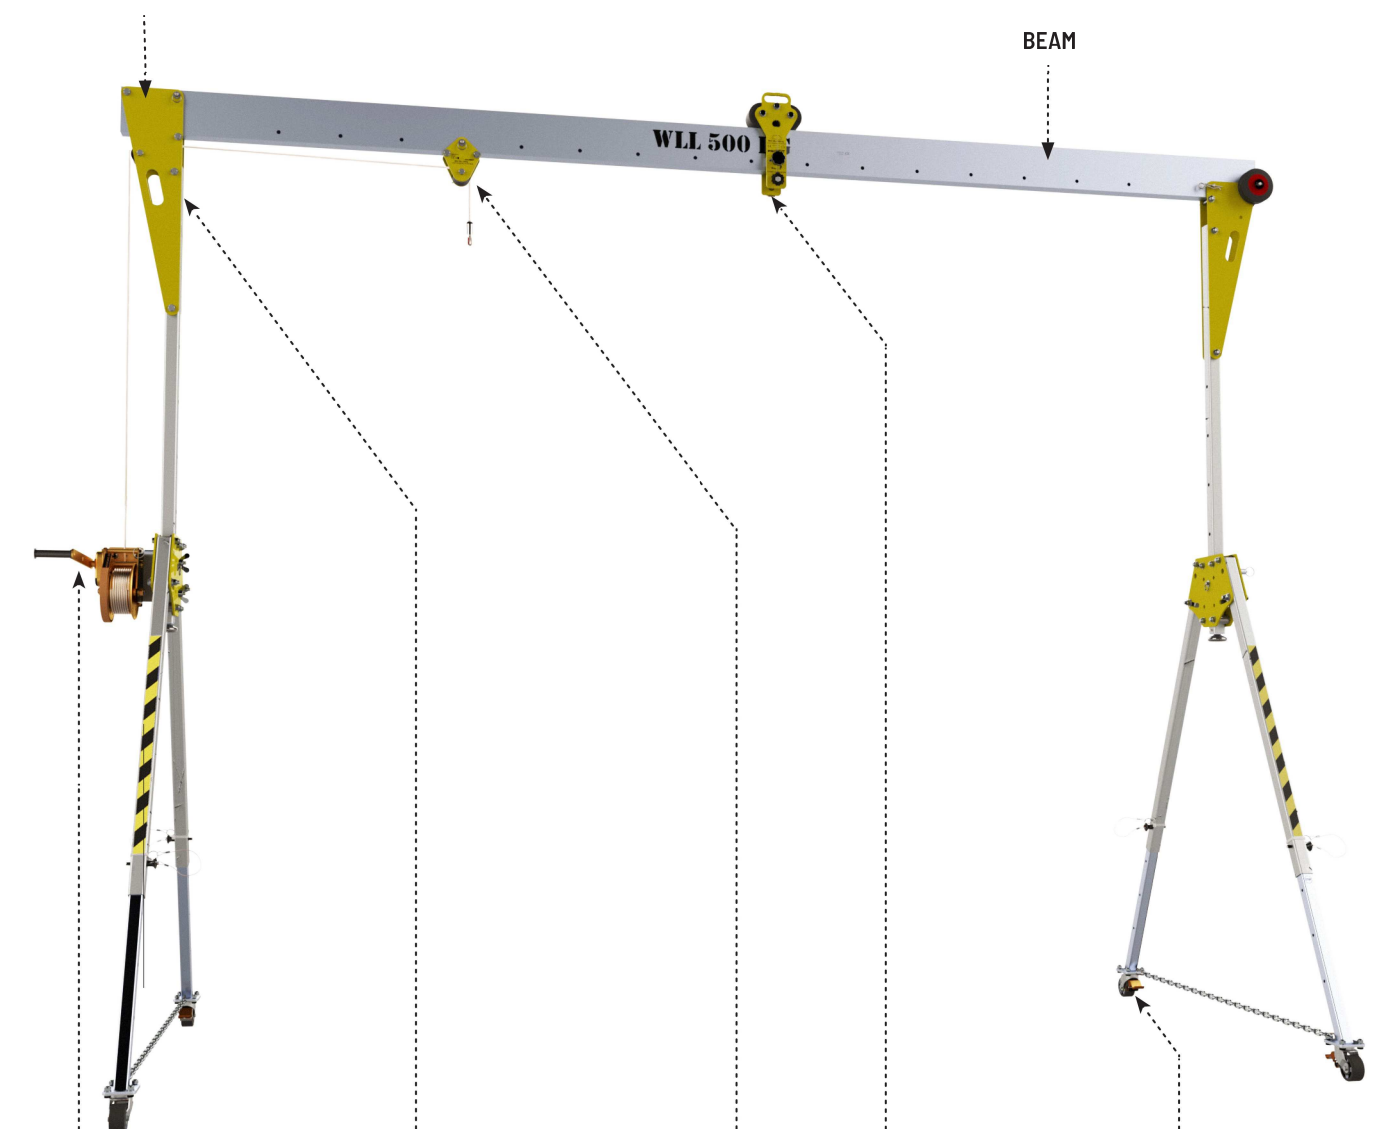


**RESCUE LIFTING DEVICE
RUP 502-ET**
(sold separately)

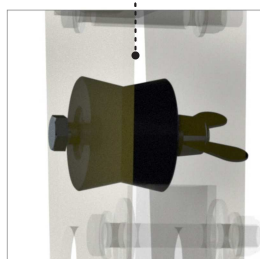

ROLLER FOR BEAM
(sold separately)
KSB 100-330

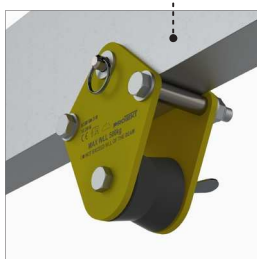

PULLEY
(sold separately)
KSB 100-310

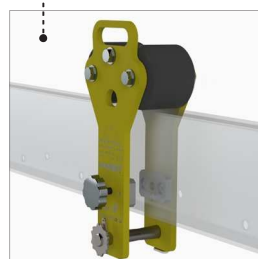


REMOVABLE TROLLEY
KSB 100-350-000



WHEEL
KSB100-900

DUE TO EUROPEAN PATENT RESTRICTIONS, THE PRODUCT IS NOT AVAILABLE IN THE FOLLOWING COUNTRIES:

Albania, Switzerland, Cyprus, Germany, France, Great Britain, Hungary, Ireland, Liechtenstein, Luxembourg, Monaco, Macedonia, Malta, The Netherlands, San Marino, Turkey.

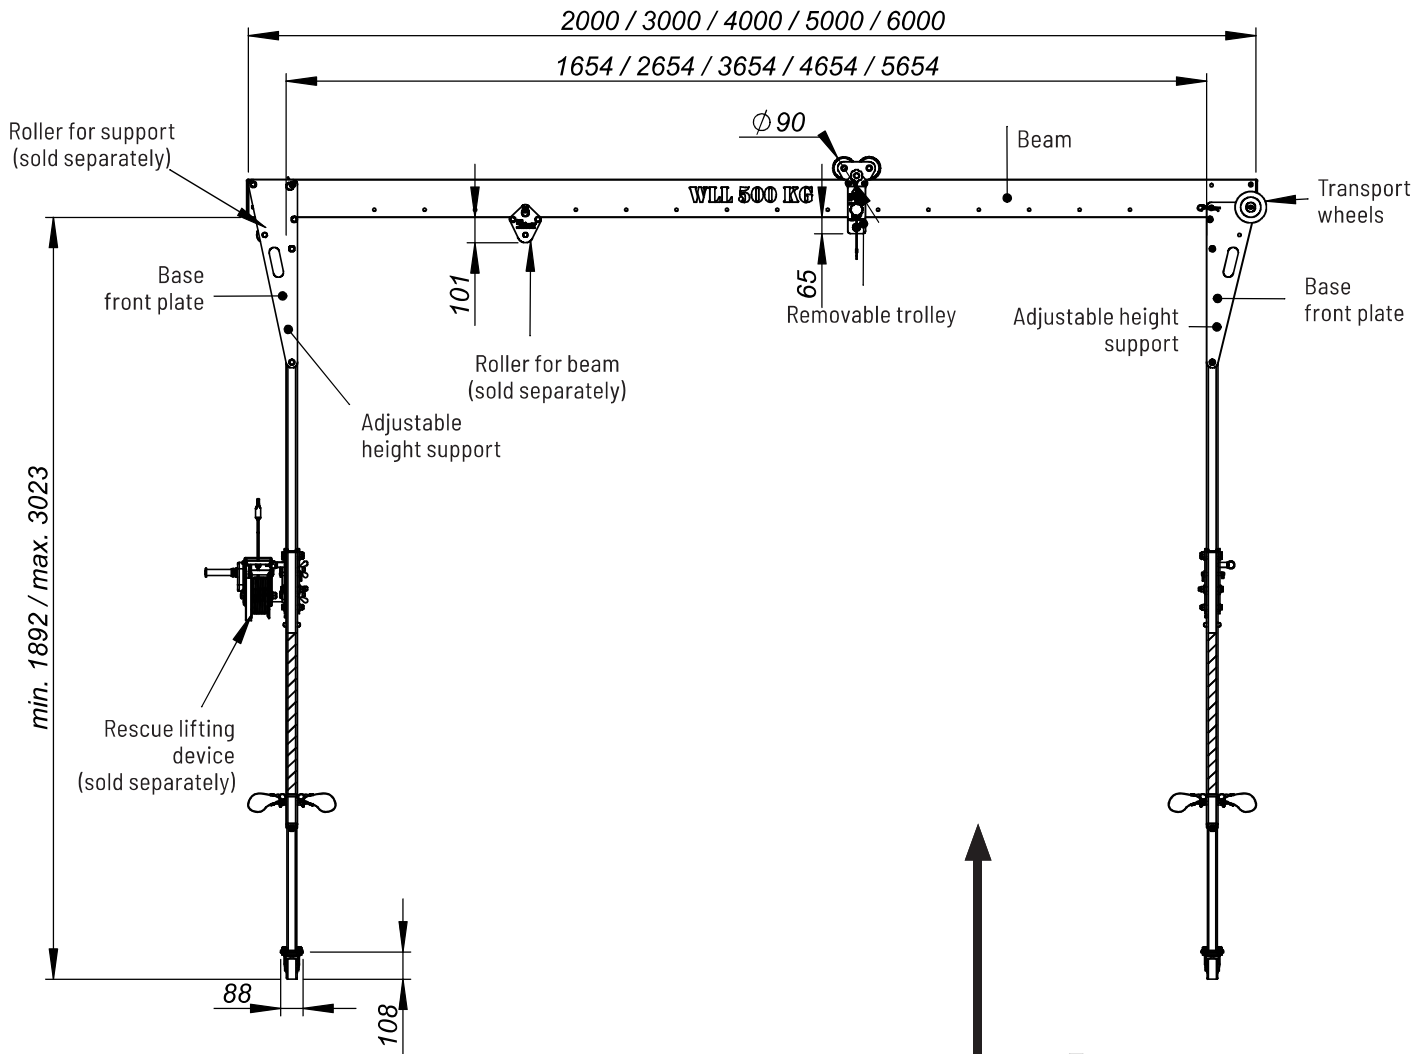

Technical description

Compact gantry KSB-LE comprises beam and two fixed supports. Thus transport of the device is facilitated and no additional tools are required for its deployment

1. Beams


ref. no. KSB200-001 - 2-meter beam
 ref. no. KSB300-001 - 3-meter beam
 ref. no. KSB400-001 - 4-meter beam
 ref. no. KSB500-001 - 5-meter beam
 ref. no. KSB600-001 - 6-meter beam


2. Supports

Height: 2.1 - 3.0 mm, permanently fixed to beam. The support is fitted with a kit of swivel wheel with brake, dia. 80mm.

3. Trolley

ref. no. KSB100-350-000
 Made of aluminium alloy, stainless steel and polyamide parts. Trolley can be locked using knob by positioning on the beam.

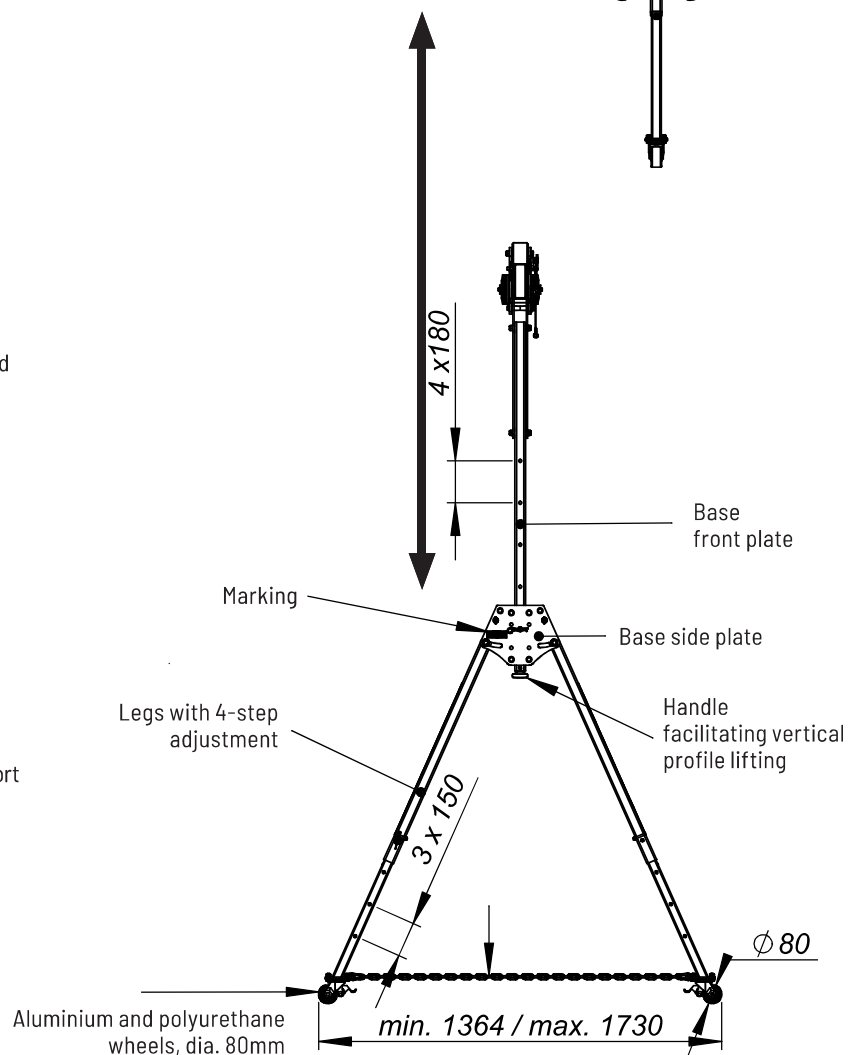


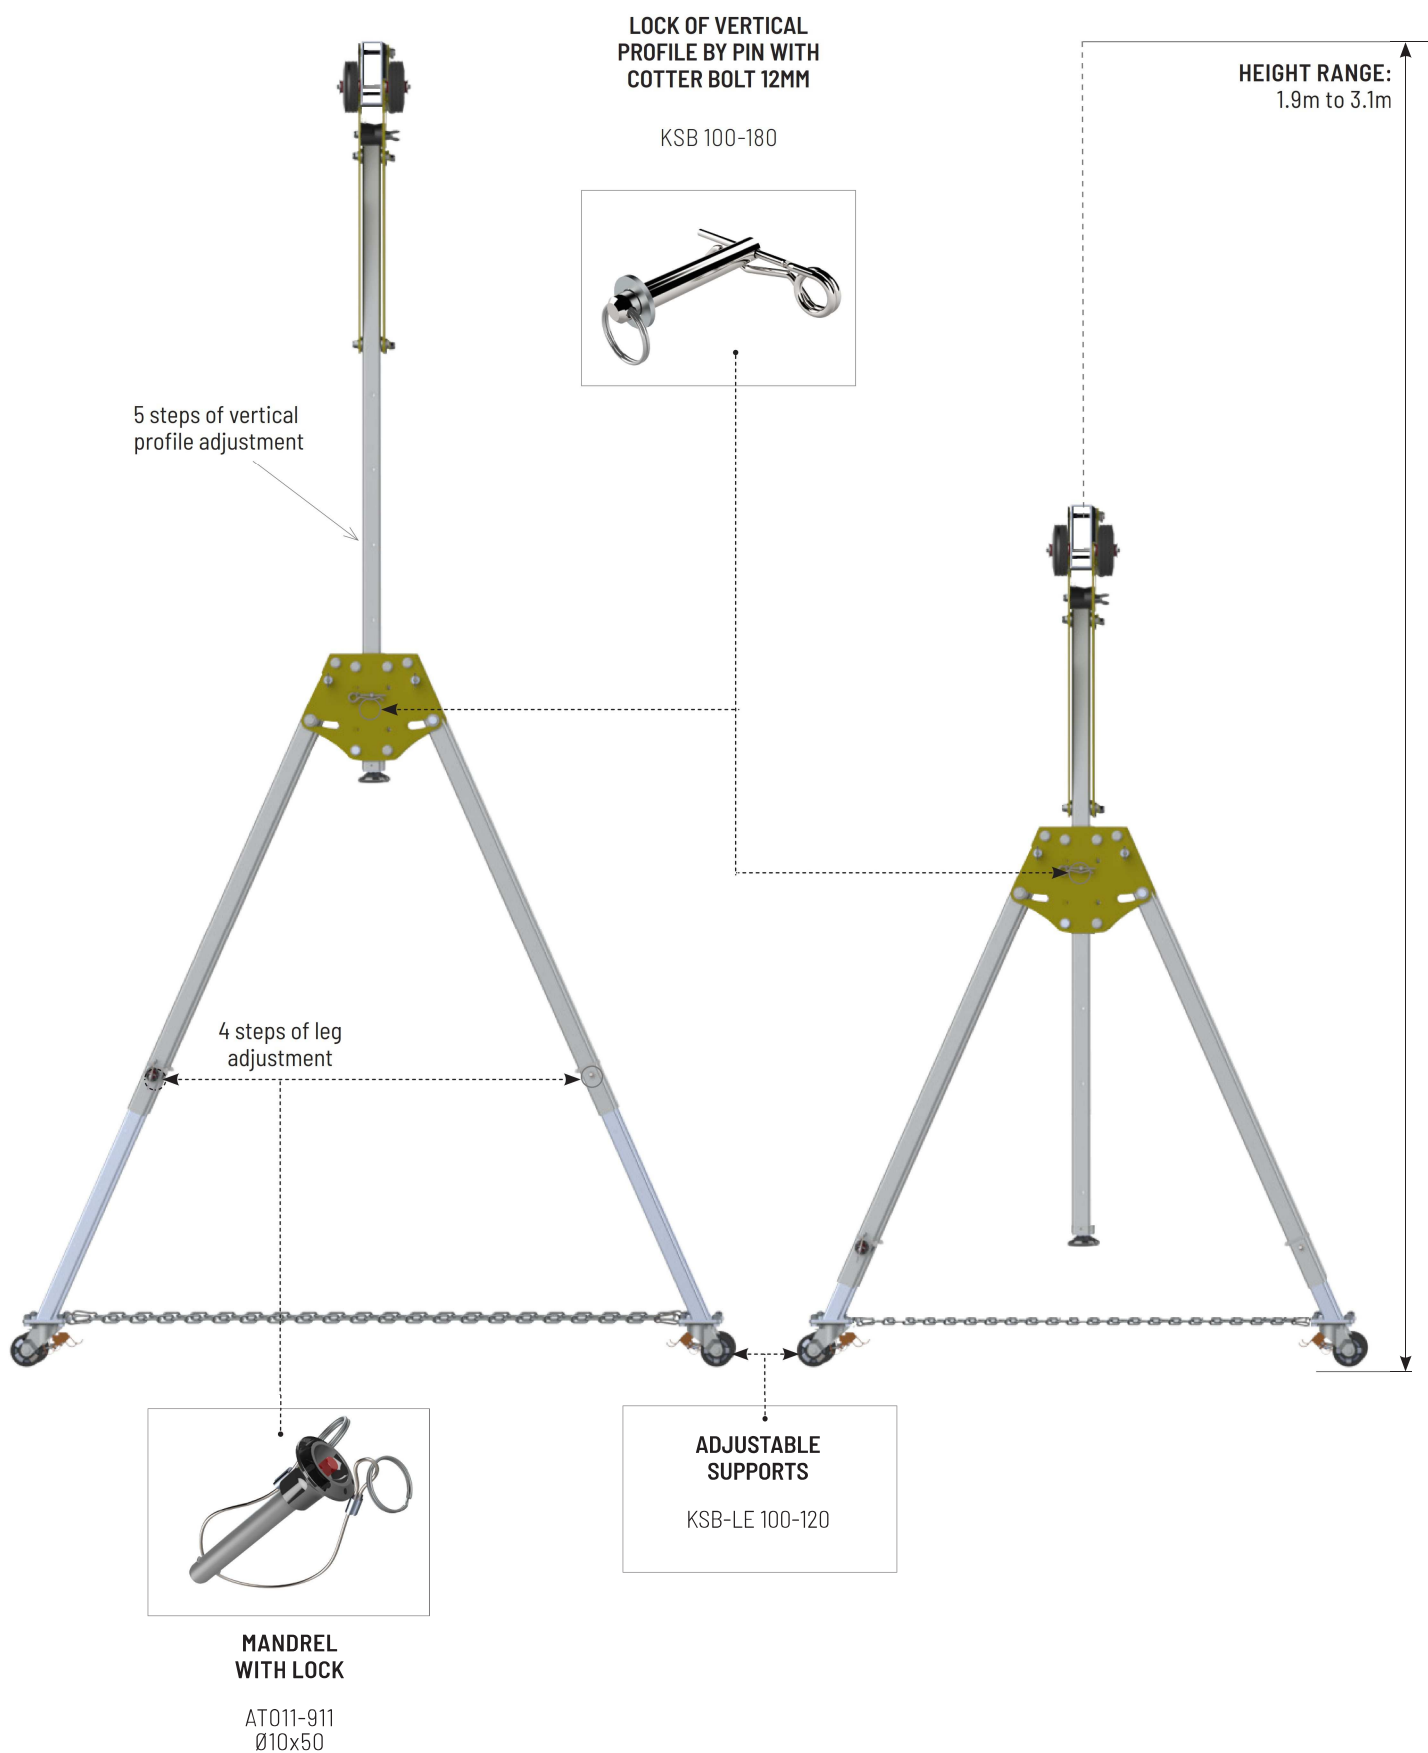

Unfolding

1

- Folded gantry KSB - LE
- Deploy bases

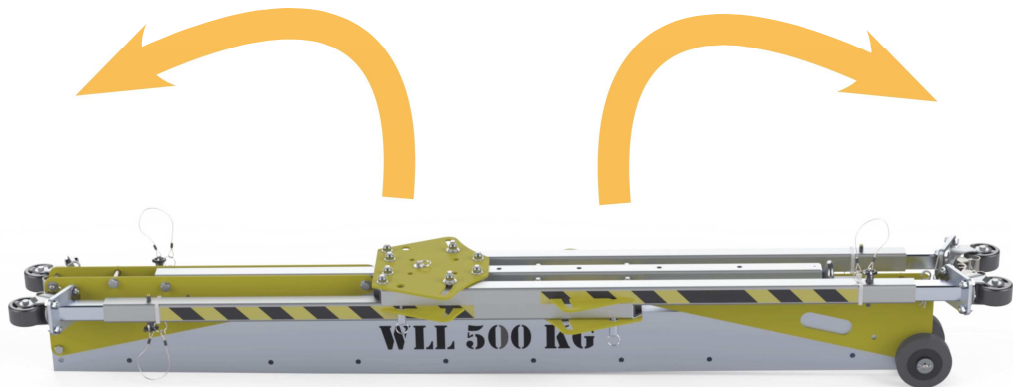


2

- Move base legs apart




3

- Place gantry legs by locking with pin

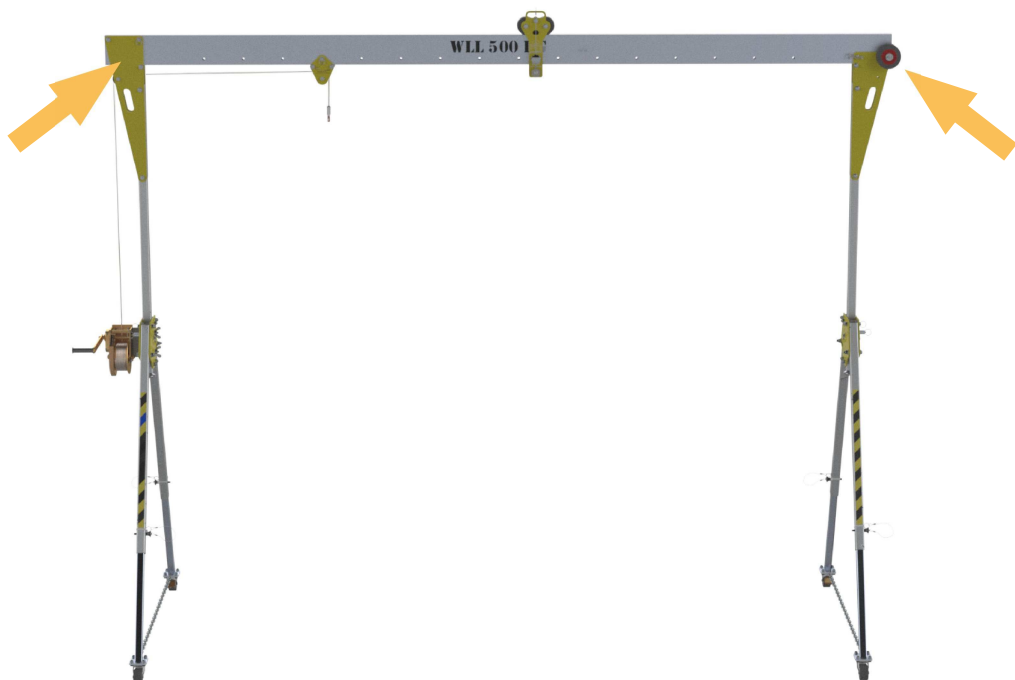


4 Install accessories

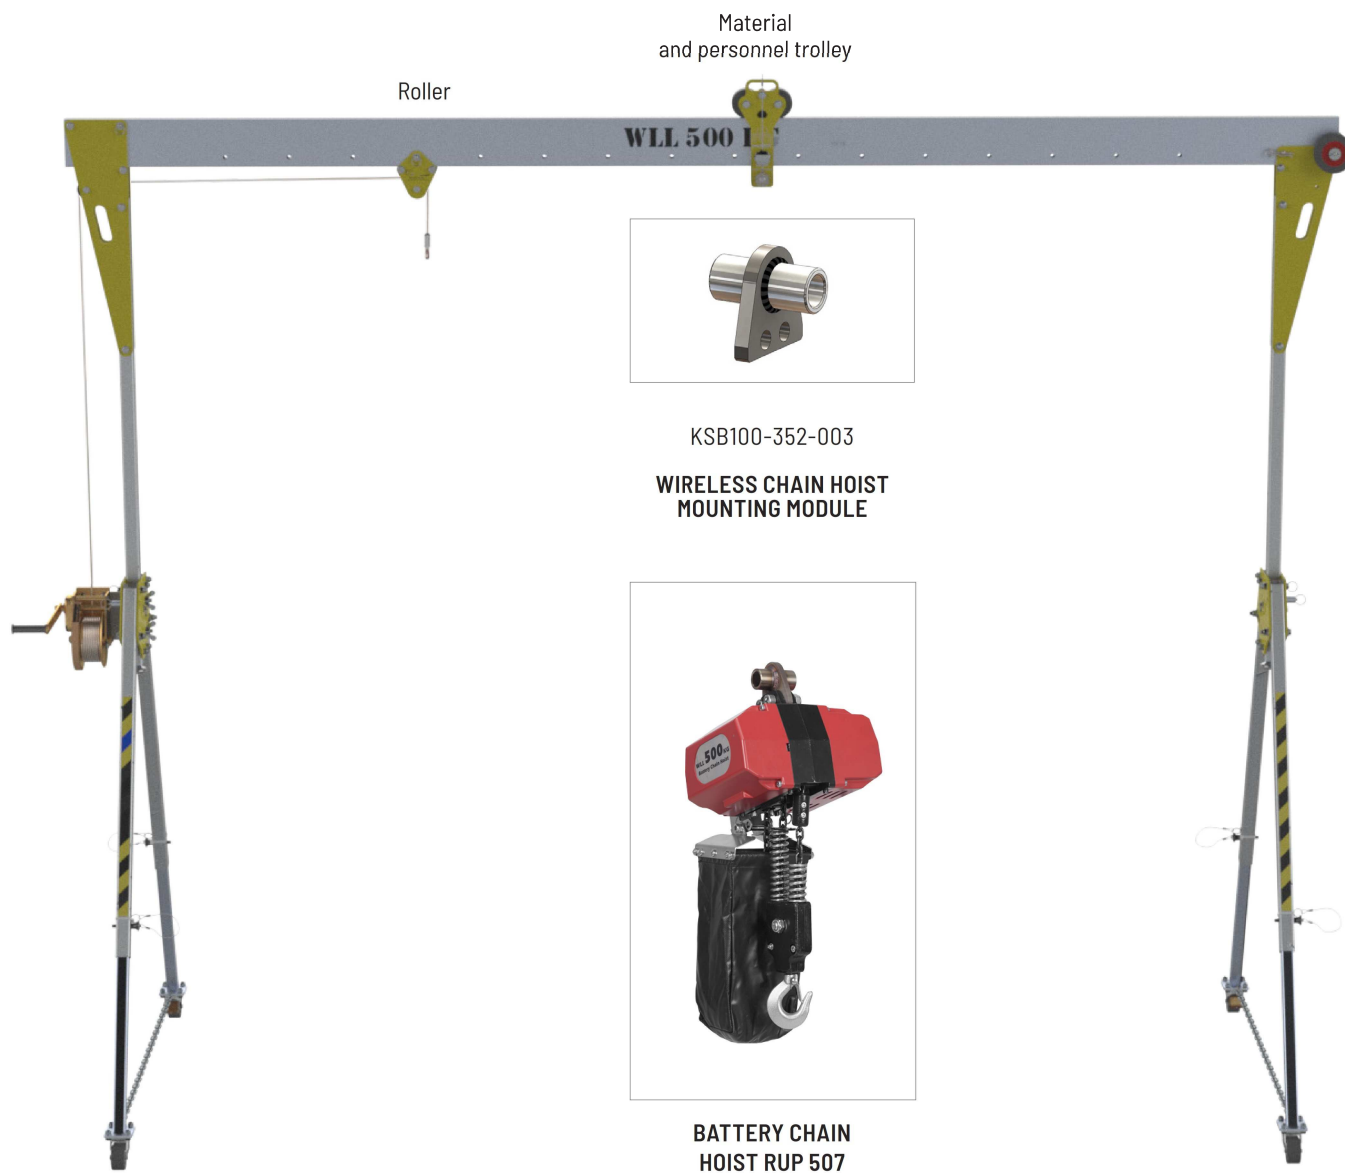

Transport

Transport dimensions

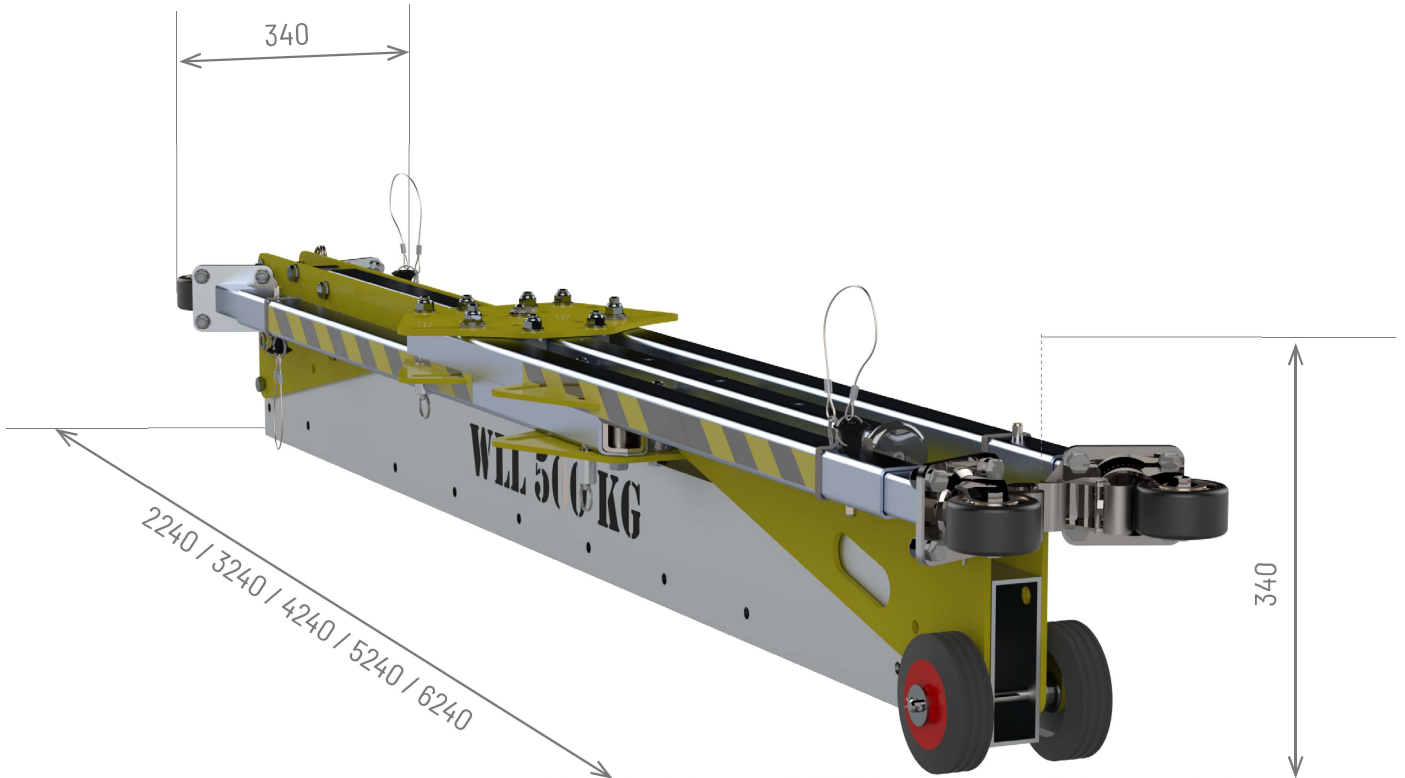

Gantry KSB-LE ready for transport





KSB - LE - Compact gantry