

KSB

COMPACT
GANTRY
CRANE



WORKING LOAD



0,5 Tonnes

FALL PROTECTION
FOR 2 USERS



2 users

SIZE

Beam length:

2-6m

Height:

2,1-3m

STANDARD

EN 13001

EN 15011

EN 795/B:2012

CEN/TS 16415/B:2013



REMOVABLE TROLLEY

KSB 100-350-000



BEAM

KSB xxx-001
xxx - length



**WORK LINE GUIDE
ROLLER**

KSB 100-310




2 SUPPORTS

KSB 100-101-1



WHEELS

KSB100-900

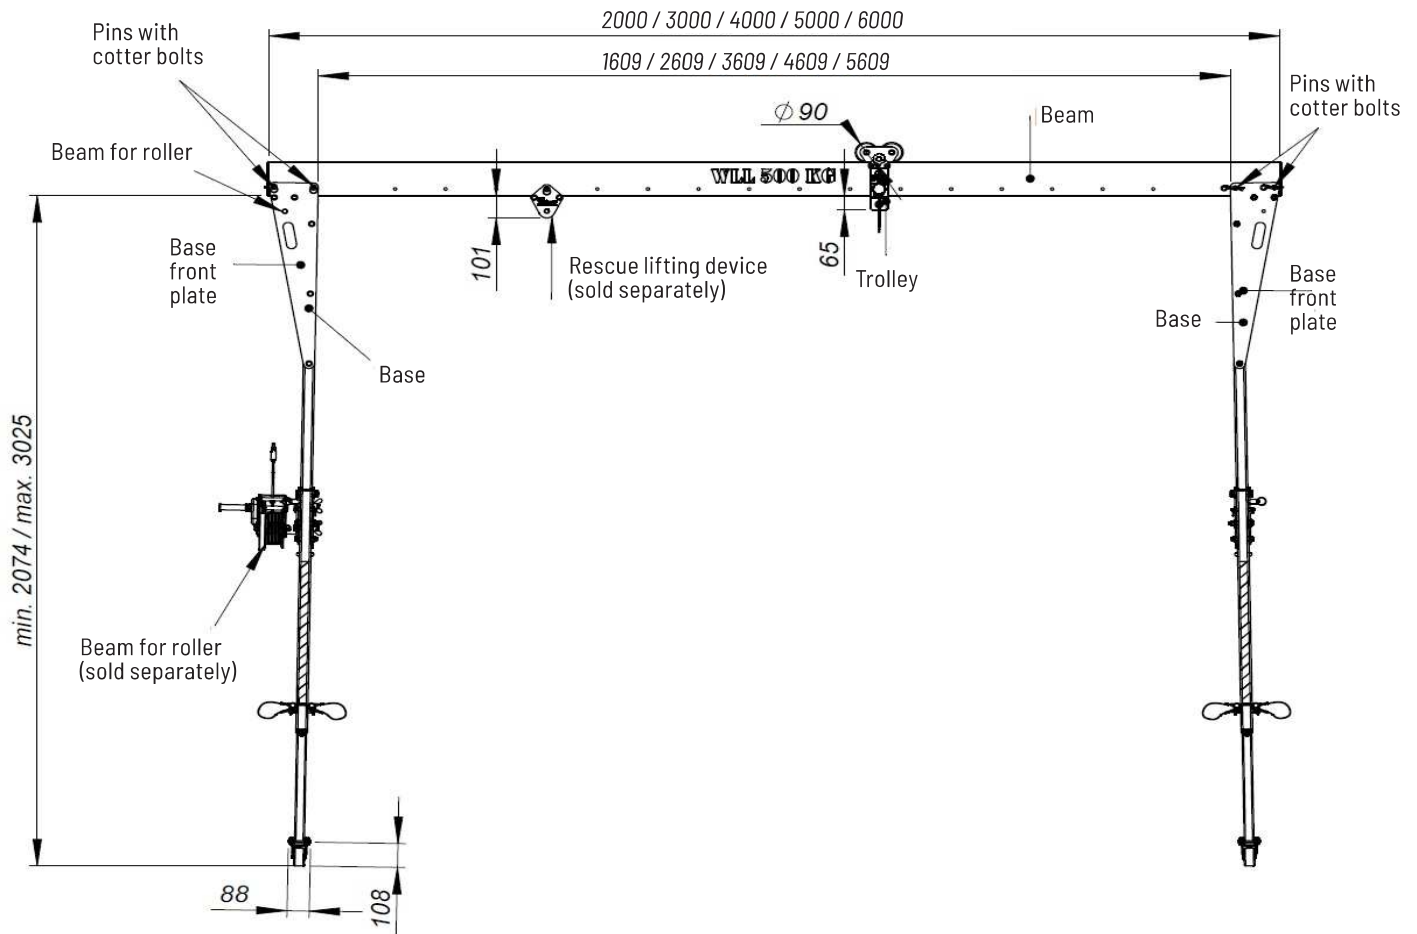

Technical description

Compact gantry KSB comprises a beam and two detachable supports fixed by pins with cotter bolts and trolley.

1. Beams


ref. no. KSB200-001 - 2-meter beam
 ref. no. KSB300-001 - 3-meter beam
 ref. no. KSB400-001 - 4-meter beam
 ref. no. KSB500-001 - 5-meter beam
 ref. no. KSB600-001 - 6-meter beam


2. Supports

K1 - one support type available (height: 2.1 - 3.0 mm)
 with set of swivel wheels with brake, dia. 80mm

3. Trolley

ref. no. KSB100-350-000
 Made of aluminium alloy, stainless steel and polyamide parts.
 Trolley can be locked using knob by positioning on the beam.

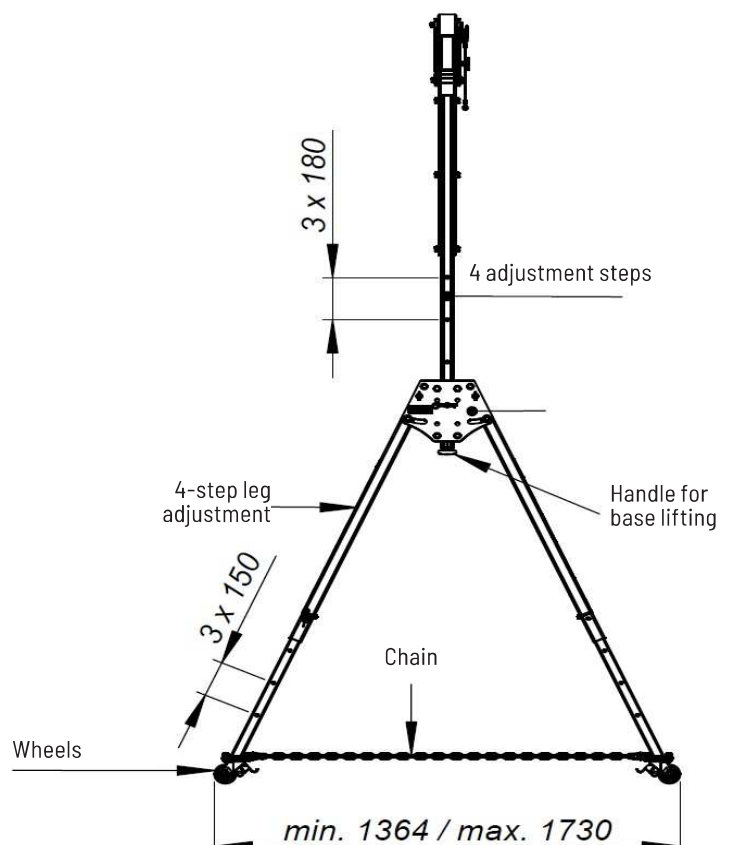

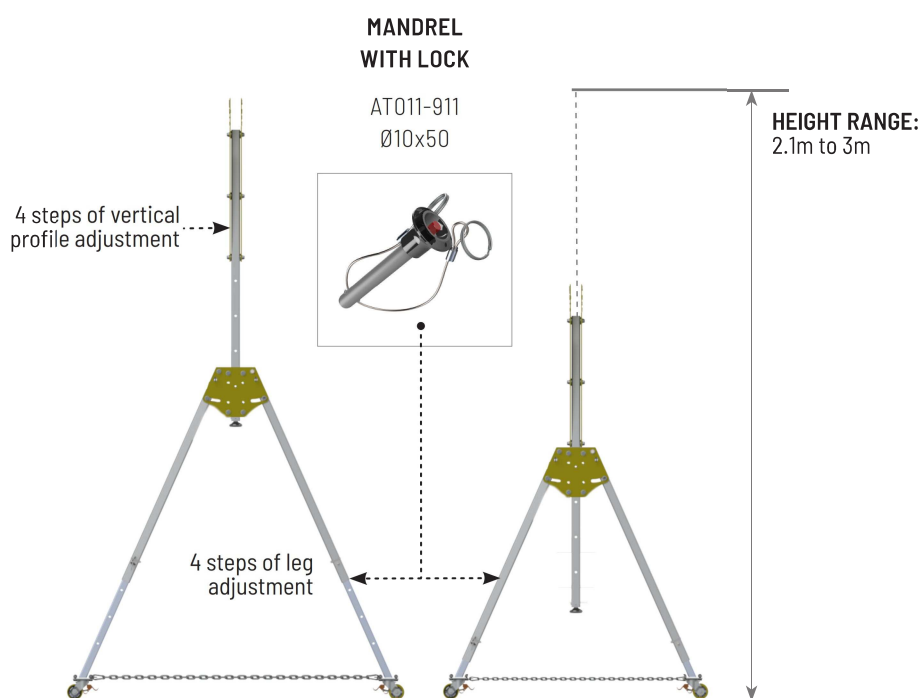

Unfolding

- 1 Gantry parts prepared for assembly.
Deploy bases.




- 2 Move base legs apart.



- 3 Place gantry legs by locking with the other pin.



4

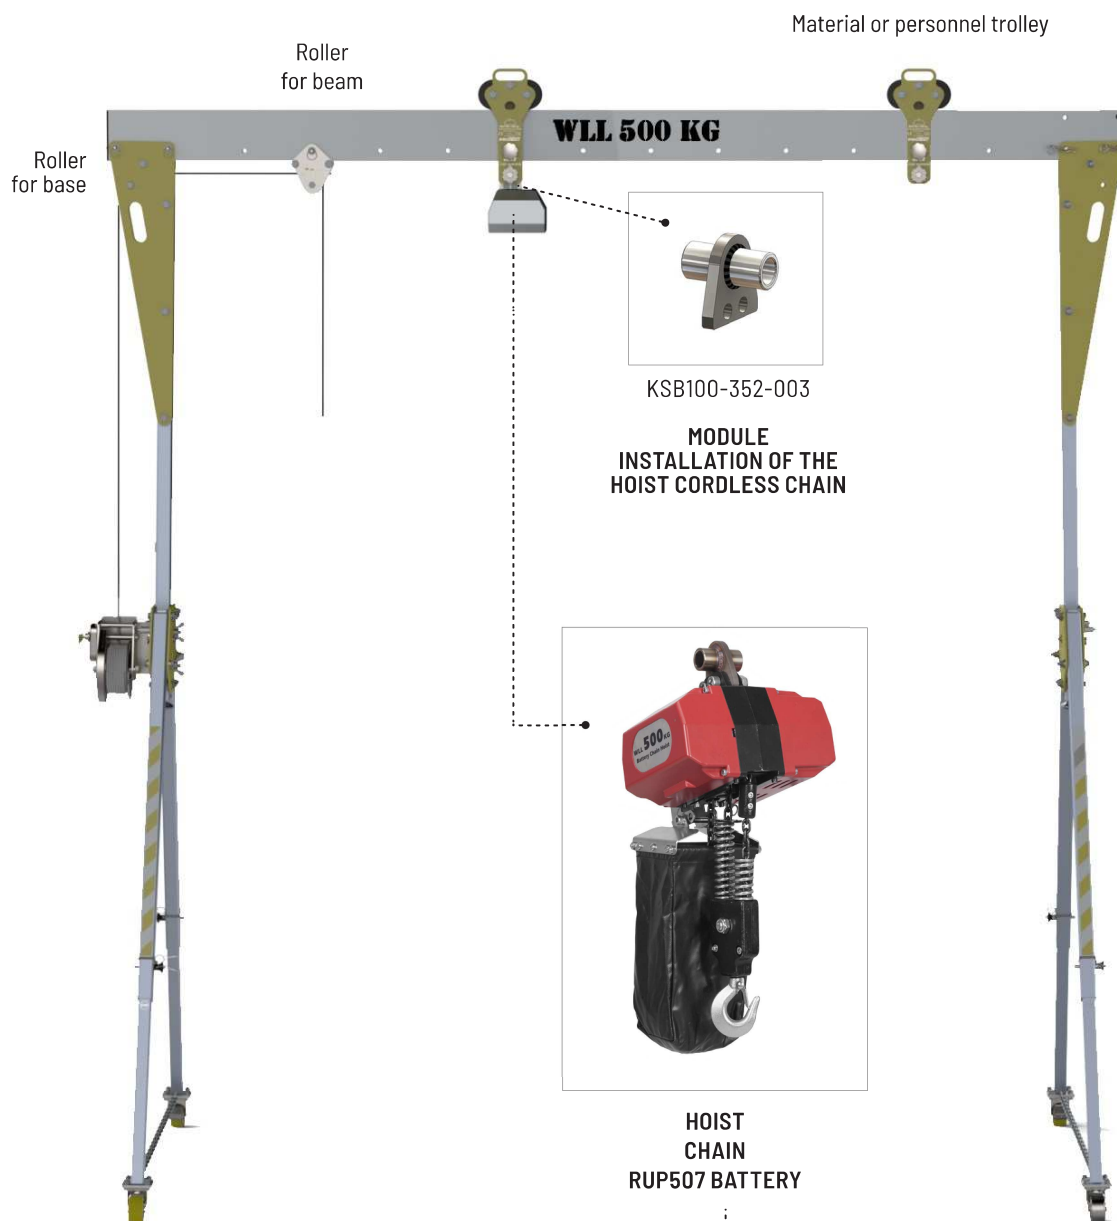

Battery chain hoist equipped with steel chain 4mmx12mm (class 80) with a working length of 6m.

The chain is hidden in a special basket.
The hoist is used to lift goods and is designed to cooperate with cranes compact KSB / KSB-LE / FSB.

Length: 6 m
Battery life: 20 min
Weight: 9 kg

DOR (Permissible operating load): 500 kg



